

## 1 Microfluidic Electrochemical Sensor for On-Line Monitoring of 2 Aerosol Oxidative Activity

3 Yupaporn Sameenoi,<sup>†</sup> Kirsten Koehler,<sup>‡</sup> Jeff Shapiro,<sup>‡</sup> Kanokporn Boonsong,<sup>†</sup> Yele Sun,<sup>§,||</sup>  
4 Jeffrey Collett, Jr.,<sup>§</sup> John Volckens,<sup>‡</sup> and Charles S. Henry\*,<sup>†</sup>

5 <sup>†</sup>Department of Chemistry, <sup>‡</sup>Department of Environmental and Radiological Health Sciences, and <sup>§</sup>Department of Atmospheric  
6 Science, Colorado State University, Fort Collins, Colorado 80523, United States

7 **S** Supporting Information

8 **ABSTRACT:** Particulate matter (PM) air pollution has a  
9 significant impact on human morbidity and mortality;  
10 however, the mechanisms of PM-induced toxicity are poorly  
11 defined. A leading hypothesis states that airborne PM induces  
12 harm by generating reactive oxygen species in and around  
13 human tissues, leading to oxidative stress. We report here a  
14 system employing a microfluidic electrochemical sensor  
15 coupled directly to a particle-into-liquid sampler (PILS)  
16 system to measure aerosol oxidative activity in an on-line  
17 format. The oxidative activity measurement is based on the  
18 dithiothreitol (DTT) assay, where, after being oxidized by PM, the remaining reduced DTT is analyzed by the microfluidic  
19 sensor. The sensor consists of an array of working, reference, and auxiliary electrodes fabricated in a poly(dimethylsiloxane)-  
20 based microfluidic device. Cobalt(II) phthalocyanine-modified carbon paste was used as the working electrode material, allowing  
21 selective detection of reduced DTT. The electrochemical sensor was validated off-line against the traditional DTT assay using  
22 filter samples taken from urban environments and biomass burning events. After off-line characterization, the sensor was coupled  
23 to a PILS to enable on-line sampling/analysis of aerosol oxidative activity. Urban dust and industrial incinerator ash samples were  
24 aerosolized in an aerosol chamber and analyzed for their oxidative activity. The on-line sensor reported DTT consumption rates  
25 (oxidative activity) in good correlation with aerosol concentration ( $R^2$  from 0.86 to 0.97) with a time resolution of approximately  
26 3 min.



## 27 ■ INTRODUCTION


28 Airborne particulate matter (PM) is a prime candidate for the  
29 generation of biological oxidative stress.<sup>1,2</sup> Epidemiological and  
30 clinical research has demonstrated strong links between  
31 atmospheric aerosols and adverse health effects, including  
32 premature deaths,<sup>3</sup> impaired pulmonary function,<sup>4</sup> neuro-  
33 degenerative disorders,<sup>5</sup> and respiratory and cardiovascular  
34 diseases.<sup>6</sup> Chemical compounds in ambient PM, including  
35 aromatic compounds and transition metals such as Fe, V, Cr,  
36 Mn, Co, Ni, Cu, Zn, and Ti, may contribute to these effects  
37 through the generation of reactive oxygen species (ROS).<sup>4,7,8</sup>  
38 The exact mechanism by which PM causes oxidative stress is  
39 not completely understood; however, PM-associated ROS can  
40 cause damage to lipids, proteins, and DNA, and these species  
41 have been implicated in pro-inflammatory effects in living  
42 tissues.<sup>4,5,7–12</sup> In normal biological systems, generation of ROS  
43 as a result of natural aerobic metabolism is balanced by  
44 endogenous antioxidants.<sup>13</sup> When ROS levels exceed cellular  
45 antioxidant capacity, the redox status of the cell and its  
46 surrounding environment changes, thereby triggering a cascade  
47 of events associated with inflammation and, at higher  
48 concentrations, significant cellular damage.<sup>14,15</sup>

49 Various approaches for measuring the oxidative activity of  
50 PM have been developed to study PM-induced oxidative

stress.<sup>16–19</sup> Chemical assays offer the best potential for analysis 51  
of effective ROS dose in a format that can support 52  
epidemiological research,<sup>1,20</sup> and many different types of 53  
chemical assays have been developed for assessing PM oxidative 54  
activity.<sup>1,16–18,20–22</sup> The oldest of these assays focused on 55  
measuring redox-specific chemicals such as transition metals 56  
and polyaromatic hydrocarbons (PAHs).<sup>22</sup> Other methods 57  
have been proposed that make use of chromatography,<sup>18,23</sup> 58  
electron paramagnetic resonance (EPR),<sup>24</sup> and fluores- 59  
cence.<sup>25,26</sup> The dithiothreitol (DTT)-based chemical assay 60  
assay is currently the most widely reported technique used to 61  
assess the capacity of PM to catalyze ROS generation.<sup>27,28</sup> In 62  
this assay, reduced DTT is oxidized to its disulfide in the 63  
presence of ROS generated by PM. After the reaction, the 64  
remaining reduced DTT is reacted with Ellman's reagent (5,5'- 65  
dithiobis(2-nitrobenzoic acid, DTNB) to produce a chromo- 66  
phore that absorbs light at 412 nm (Scheme 1). Thus, the rate 67 s1  
of DTT consumption is proportional to the oxidative activity of 68  
the PM sample.<sup>2</sup> Using this assay, redox-active quinones have 69  
been shown to catalyze the transfer of electrons from DTT to 70  
oxygen, generating superoxide.<sup>27,29</sup> Furthermore, levels of PM 71

Received: April 4, 2012

**Scheme 1. Analysis of Aerosol Oxidative Activity Using the DTT Assay with Traditional (Yellow Box) and Microfluidic Electrochemical Detection (Blue Box) Methods**

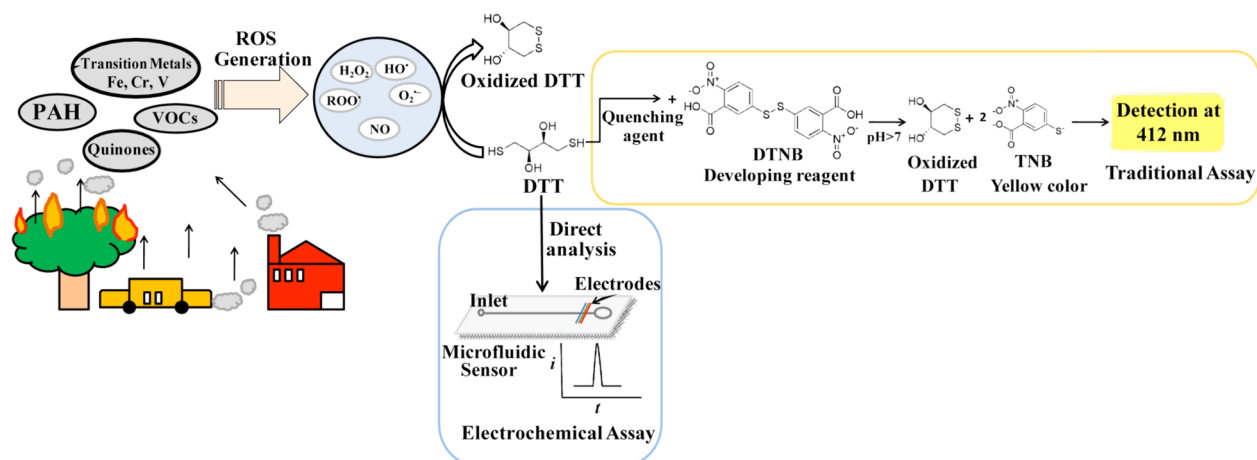


72 oxidative activity measured by this assay have been correlated  
 73 with increased levels of biological oxidative stress in vitro.<sup>28</sup>  
 74 The traditional assay, however, requires the use of both  
 75 quenching and developing agents, which results in sample  
 76 dilution and a higher detection limit. Another major limitation  
 77 of all current assays for PM oxidative activity is that they rely on  
 78 a classic filter-based collection of PM. These methods require  
 79 long (up to 110 h) aerosol sampling durations to capture  
 80 sufficient mass for detection.<sup>30</sup> The long sampling times not  
 81 only reduce the temporal resolution of the measurement but  
 82 also increase the potential for collected species to react and  
 83 change composition prior to analysis.<sup>19,21</sup> These methods also  
 84 require analysis using laboratory-based instrumentation that is  
 85 not readily integrated into portable, field measurement systems.  
 86 To overcome problems with filter collection and off-line  
 87 laboratory analysis, an on-line analysis system was developed by  
 88 the Hopke group.<sup>25,26,31</sup> Their system uses the particle-into-  
 89 liquid sampler (PILS)<sup>32,33</sup> for aerosol sampling and a  
 90 dichlorofluorescein (DCFH)-based assay to determine par-  
 91 ticle-bound ROS activity. The PILS offers the potential for  
 92 direct, real-time measurement of aerosol-bound ROS and  
 93 represents the first step toward on-line measurement of aerosol  
 94 oxidative activity. However, the stability of the DCHF reagent,  
 95 due to photobleaching and photo-oxidation, proved problem-  
 96 atic during analysis, resulting in larger than desired  
 97 variability.<sup>34,35</sup> In addition, an internal standard was not used  
 98 to account for sample dilution by the PILS system.<sup>25,31,35</sup>  
 99 Temporal resolution of this system was also limited (>20 min/  
 100 sample) by the long sampling periods needed for sufficient  
 101 mass capture and subsequent sample flushing/rinsing periods  
 102 to ensure proper detector performance.<sup>35</sup>

103 Here we present a microfluidic electrochemical sensor for  
 104 on-line monitoring of aerosol oxidative activity that is smaller,  
 105 less expensive, and more portable than previously reported  
 106 systems. Microfluidic devices can handle small sample volumes  
 107 efficiently, and thus, they are attractive for field-based  
 108 measurements.<sup>36,37</sup> They can also be multiplexed to carry out  
 109 multiple types of chemistry at the same time.<sup>38–40</sup> Electro-  
 110 chemical sensing is also well-suited for microfluidics because of  
 111 the ease of integration and low cost.<sup>41,42</sup> By the choice of  
 112 detection potential and/or electrode modification, electro-  
 113 chemistry also provides high sensitivity and high selectivity  
 114 even when working with low analyte masses.<sup>43–45</sup> The sensor  
 115 reported here is based on the existing DTT assay, with several

116 simplifying modifications. A schematic of the procedure for  
 117 both the traditional and new DTT assays is shown in Scheme 1.  
 118 Following the reaction of DTT with PM, the remaining DTT is  
 119 analyzed directly by the sensor, eliminating the need for  
 120 quenching and developing reagents associated with UV–vis  
 121 detection. The electrochemical sensor is highly sensitive and  
 122 capable of detecting small changes in the DTT electrochemical  
 123 signal following reaction with a small amount of PM. Reducing  
 124 the required sample mass also increases temporal resolution of  
 125 the instrument, as less mass is needed for each individual  
 126 measurement. Reducing the number and quantity of reagents  
 127 also simplifies the system, making it more portable.

128 To create an electrochemical sensing device for DTT  
 129 detection, a cobalt(II) phthalocyanine (CoPC)-modified  
 130 carbon paste electrode (CPE) was used as an electrode  
 131 material. CoPC–CPE has shown good selectivity for the  
 132 catalytic oxidation of thiol compounds such as DTT, is stable  
 133 for long periods of time, and can be fabricated in a microfluidic  
 134 device.<sup>46,47</sup> The electrode design and fabrication is based on our  
 135 prior work and utilizes a poly(dimethylsiloxane) (PDMS)-  
 136 containing binder to generate a CPE with high physical stability  
 137 and good electron transfer properties. The electrode  
 138 composition and system operating parameters were optimized  
 139 using cyclic voltammetry. System performance was then  
 140 characterized off-line using flow injection analysis and  
 141 amperometric detection to establish the linear range, detection  
 142 limit, and sensitivity of the electrode toward DTT. Then to  
 143 characterize the DTT assay, the working range and sensitivity  
 144 of the assay chemistry were then determined using a model  
 145 oxidant, 1,4-naphthoquinone (1,4-NQ). Reactions of DTT and  
 146 1,4-NQ were performed off-line, and the remaining DTT was  
 147 directly measured by the sensor. The sensor performance was  
 148 found to depend on the starting concentration of DTT, with  
 149 lower concentrations giving higher sensitivity but a lower  
 150 working range. As a final off-line validation step, 14 extracted  
 151 filtered samples of ambient urban PM and biomass burning  
 152 aerosols were analyzed. The results showed no significant  
 153 difference in the oxidative activity measured by the sensor  
 154 versus the traditional method. Finally, to demonstrate that the  
 155 sensor can be applied for the measurement of aerosol oxidative  
 156 activity in situ, we connected the sensor to an on-line aerosol  
 157 sampling system (Scheme 2). PM collected by the PILS reacted  
 158 with DTT in sample transfer lines, and the remaining reduced  
 159 DTT was analyzed directly. Lithium fluoride was used as an

### Scheme 2. Automated Sampling/Analysis System for Aerosol Oxidative Activity<sup>a</sup>

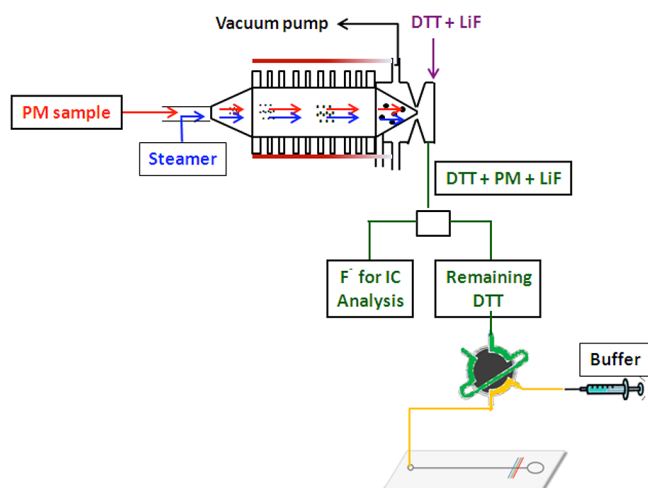

<sup>a</sup>Aerosol was collected by the PILS and mixed with DTT reagent and lithium fluoride (internal standard LiF). Following reaction within the sample line, the remaining DTT was analyzed directly by a microfluidic electrochemical sensor.

160 internal standard to account for aerosol dilution by the PILS. A  
161 strong linear correlation between aerosol concentration and the  
162 measured oxidative activity (DTT consumption rate) was  
163 observed at concentrations similar to those found in polluted  
164 air ( $4\text{--}120\ \mu\text{g m}^{-3}$ ). High temporal resolution was obtained; at  
165 least three aerosol samples were analyzed every 10 min. To the  
166 best of our knowledge, the system gives the fastest time  
167 information on the aerosol oxidative activity available, which  
168 can greatly contribute to the future understanding of how  
169 aerosols affect human health during short-term exposure events.


## 170 ■ RESULTS AND DISCUSSION

### 171 Electrode Composition and System Optimization.

172 Carbon paste electrodes, a mixture of graphite and binders  
173 (mineral oils, nonconducting polymers, etc.), have shown  
174 potential as electrochemical sensors in microchip devices<sup>48,49</sup>  
175 because of their ease of fabrication and the ability to modify the  
176 electrode with a range of chemically selective dopants.<sup>50</sup>  
177 Various methods have been reported for carbon paste electrode  
178 fabrication on microfluidic devices, including the insertion of

tube sleeves into the device and screen printing.<sup>49,51</sup> Of these  
179 methods, screen printing is particularly attractive because it can  
180 be performed directly on-chip with electrode dimensions  
181 controlled by screens or channels on the device itself. In this  
182 work, an electrode fabrication method analogous to screen-  
183 printing was used to produce on-chip electrodes using carbon  
184 paste with a custom-designed binder (details for electrode  
185 fabrication provided in the Supporting Information, Figure S-  
186 1).<sup>44</sup> We found that these electrode systems provided  
187 robustness and good electrochemical properties. The electro-  
188 chemical sensor can be reused over a month by being rinsed  
189 with deionized water daily. They were also characterized with  
190 catecholamines that have limited fouling potential. DTT  
191 requires the addition of a catalyst, however, to reduce the  
192 oxidation potential and reduce fouling.<sup>55,56</sup> Cobalt phthalocya-  
193 nine (CoPC) is one of the more common electrocatalytic  
194 agents used and acts as a redox mediator that lowers the  
195 overpotential for thiols.<sup>52–54</sup> The two-step electrocatalytic  
196 mechanism starts with the electrochemical oxidation of  
197 cobalt(II) phthalocyanine to cobalt(III) phthalocyanine,  
198 followed by the chemical oxidation of DTT and regeneration  
199 of the cobalt(II) phthalocyanine.<sup>52</sup> Since both the solution pH  
200 and CoPC composition impact DTT detection, the signal for 1  
201 mM DTT as a function of the CoPC concentration (%) and  
202 solution pH was studied using cyclic voltammetry.<sup>52,55–57</sup> A  
203 two-variable experimental design was used for this optimization  
204 study.<sup>58</sup> Optimal values giving the highest signal of anodic  
205 current (scan range  $-0.1$  to  $+1$  V vs unmodified CPE) were  
206 obtained at a CoPC concentration of 12% (w/w) and a  
207 solution pH of 7 (detailed discussion provided in the  
208 Supporting Information, Figure S-2). Therefore, this compo-  
209 sition of CoPC was used for CPE modification, and a solution  
210 pH of 7 was used as the running buffer for all subsequent  
211 experiments. 212

As a first step to test the performance of the sensor, a flow  
213 injection analysis system was designed for off-line measure-  
214 ments of aerosol oxidative activity. The voltammetric behavior  
215 of the systems was established first (Figure 1A). The  
216 voltammogram shape is different from those of most  
217 hydrodynamic voltammograms where the current plateaus at  
218 higher potentials because of mass transport. The unusual  
219 behavior shown here can be attributed to many factors such as  
220 additional oxidation and decomposition of the phthalocyanine  
221 ring at higher potentials and irreversible complexation of the  
222

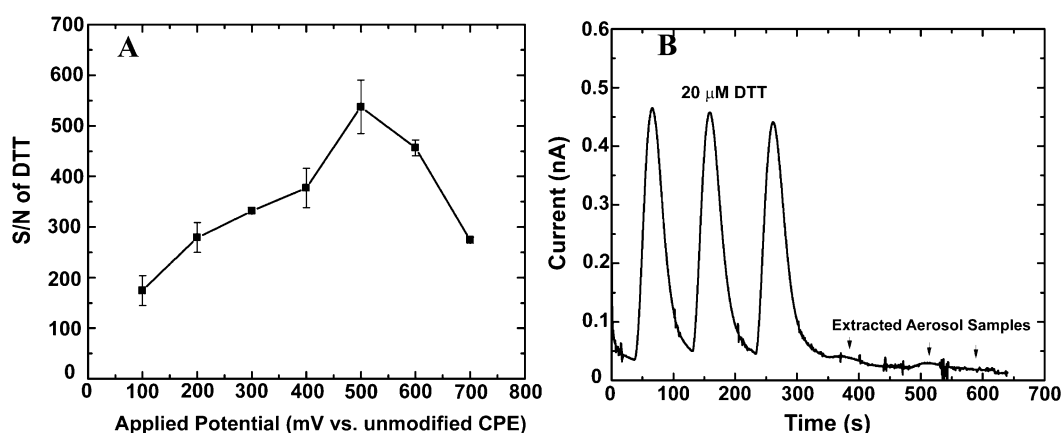

**Figure 1.** Selectivity of the microfluidic electrochemical sensor for DTT. (A) Hydrodynamic voltammogram plotted as the signal-to-noise ratio as a function of the applied potential from 100  $\mu\text{M}$  DTT injection ( $n = 3$ ). (B) Flow profiles from injections of DTT and extracted aerosol samples.



223 Co(III) center.<sup>57,59,60</sup> While the highest signal-to-noise ratio  
 224 (S/N) was observed at +0.5 V, we selected a potential of +0.2 V  
 225 for selective DTT detection to avoid potential interference (i.e.,  
 226 oxidation signal) from other redox-active species typically  
 227 present in ambient aerosols. These species include metals such  
 228 as Fe, Cr, V, and Ni and a broad spectrum of organic  
 229 compounds such as PAHs (for example, pyrene, fluoranthene,  
 230 chrysene), redox cycling agents (hydroquinones), olefins,  
 231 aldehydes, ketones, and nitro compounds.<sup>61,62</sup> Although some  
 232 chemicals can be oxidized at 0.2 V (according to standard  
 233 reduction potentials), our electrochemical sensor is chemically  
 234 modified as discussed above for selective detection of DTT.<sup>63</sup>  
 235 For each measurement, we also injected an aerosol sample  
 236 extract in the absence of DTT (i.e., as a negative control) to  
 237 ensure the sample did not contribute to the electrochemical  
 238 signal. Since aerosol composition is highly variable, 14 different  
 239 filter samples were employed to test for interferences. These  
 240 samples included biomass burning aerosol and urban aerosols  
 241 collected during both summer and winter seasons. All samples  
 242 showed negligible interferences at the DTT detection potential  
 243 (data not shown). Example results (Figure 1B) show a high  
 244 signal for DTT (20  $\mu\text{M}$ ) and no signal for the extracted aerosol  
 245 sample.

246 **Analytical Figures of Merit.** After determination of the  
 247 optimal electrochemical conditions, the figures of merit for  
 248 DTT were determined to ensure that the experimental  
 249 conditions provide effective analysis for the remaining reduced  
 250 DTT using flow injection analysis for DTT concentrations of  
 251 10–100  $\mu\text{M}$ . A plot of the average peak current (nA) ( $n = 3$ ) as  
 252 a function of the DTT concentration ( $\mu\text{M}$ ) gave a linear  
 253 calibration curve from 10 to 100  $\mu\text{M}$  ( $y = 0.037x - 0.43$ ,  $R^2 =$   
 254 0.997) (see the Supporting Information, Figure S-3). The  
 255 relative standard deviation from 10 consecutive injections of  
 256 100  $\mu\text{M}$  DTT was 7.0%, and electrode fouling was not  
 257 observed (data not shown). The limit of detection for DTT  
 258 defined as the concentration that gives a signal 3 $\times$  larger than  
 259 the baseline noise was  $2.49 \pm 0.20 \mu\text{M}$  ( $n = 5$ ) (equivalent to  
 260 24.9 pmol for a 10  $\mu\text{L}$  injection), which is comparable to those  
 261 of similar microfluidic electrochemical sensors.<sup>57,64</sup>

262 **Sensor Performance Study.** Following calibration, the  
 263 sensor was used to measure PM oxidative activity. The effect of  
 264 the DTT starting concentration on the assay dose–response  
 265 curve using 1,4-NQ as a model oxidant was studied for  
 266 sensitivity and working range. The results shown in Figure 2  
 267 demonstrate that, at low starting DTT (25 nmol), the signal

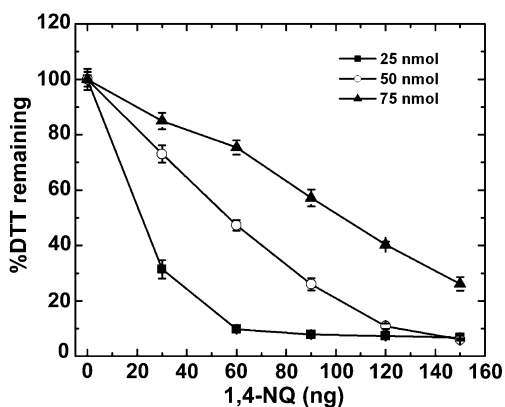


Figure 2. Impact of the initial DTT amount on the assay dose–response ( $n = 3$ ).

dropped quickly with increasing 1,4-NQ concentration, 268  
 providing the highest sensitivity of all three conditions tested 269  
 (sensitivities of  $-1.50\%$ ,  $-0.75\%$ , and  $-0.50\%$  DTT remaining/  
 270 ng of 1,4-NQ for 25, 50, and 75 nmol, respectively). The  
 271 decrease in signal at higher starting DTT levels (75 nmol) is  
 272 more gradual but provides a larger assay working range. These  
 273 results indicated that the assay sensitivity and working range  
 274 can be tuned according to the levels of DTT present in  
 275 solution. In all remaining off-line assays, 25 nmol (50  $\mu\text{L}$  of 0.5  
 276 mM) of DTT was used to provide high sensitivity at the low  
 277 oxidative activity of our PM samples. 278

Finally, the new sensor was compared to the traditional DTT 279  
 assay for aerosol oxidative activity using 14 representative 280  
 aerosol filter samples (Supporting Information, Table S-1). The 281  
 1,4-NQ equivalent values obtained by the two methods were 282  
 compared using a paired  $t$  test and plotted for correlation 283  
 (Figure 3). There was no significant difference ( $t_{\text{obsd}} = 1.621$ , 284 3


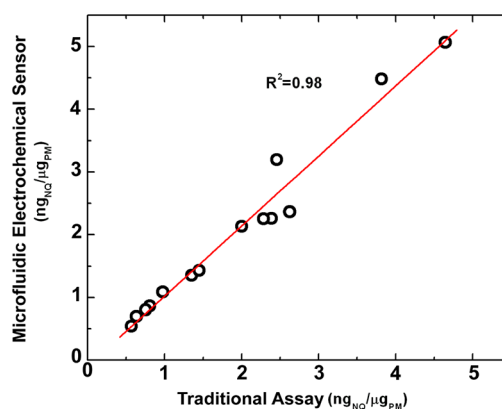


Figure 3. Comparison of PM oxidative activity (1,4-NQ equivalent unit,  $\text{ng}_{\text{NQ}}/\mu\text{g}_{\text{PM}}$ ) between the traditional DTT assay and the microfluidic electrochemical sensor (off-line). The data represent aqueous extracts of 14 different aerosol samples.


285  $t_{\text{critical}} = 2.179$ ,  $p = 0.05$ ) in the 1,4-NQ equivalent values 285  
 obtained using the electrochemical DTT sensor and the 286  
 traditional DTT assay. A good correlation for the 1,4-NQ 287  
 equivalent values determined by the two methods was observed 288  
 ( $R^2 = 0.96$ ). The equivalence between the two methods 289  
 demonstrates that the new electrochemical DTT assay is 290  
 suitable for the measurement of oxidative activity from PM 291  
 samples collected on filters. Moreover, the electrochemical 292  
 assay for filter samples requires 100 times less sample for 293  
 detection when compared to the traditional assay (10  $\mu\text{L}$  vs 294  
 1000  $\mu\text{L}$ ).<sup>27–29,65</sup> This reduction allows for a commensurate 295  
 reduction in field sampling duration, representing a significant 296  
 advantage over the traditional DTT assay. The inclusion of 297  
 several aerosol types (biomass burning smokes, urban winter 298  
 aerosols, urban summer aerosols) indicates that this finding is 299  
 not restricted to a small class of aerosol types. 300

301 **On-Line Aerosol Oxidative Activity Measurement.**  
 After the electrochemical microfluidic sensor was validated 302  
 for measurement of DTT consumption by PM from filters, the 303  
 sensor was connected to a PILS to create an on-line aerosol 304  
 oxidative activity analysis system (Scheme 2). 305

As a first step, the system was tested to show the ability to 306  
 detect reduced DTT in the presence of nonoxidizing aerosols. 307  
 Sodium chloride (NaCl) aerosol, which has no oxidative 308  
 activity, was created in the chamber at various concentrations 309  
 and the DTT signal measured. The results shown in Figure 4A 310 4

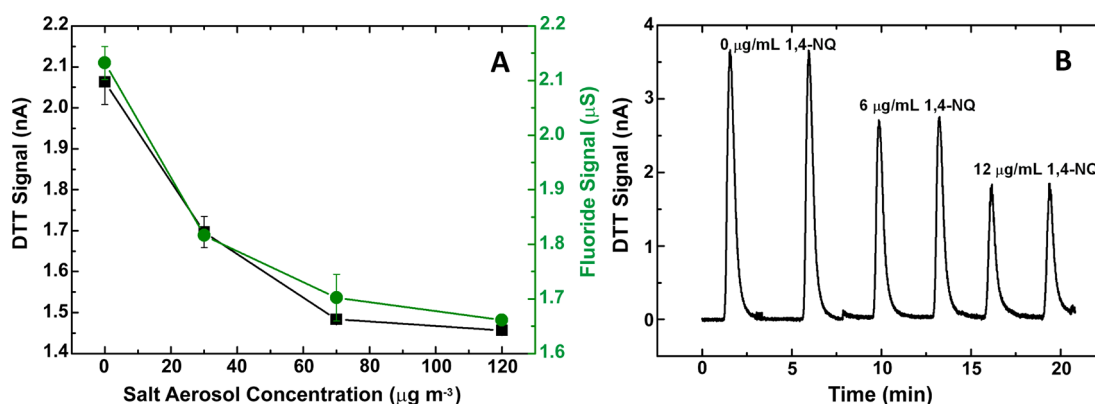

**Figure 4.** Initial study of the on-line aerosol oxidative activity system. (A) DTT (black) and fluoride (green) response curve as a function of the salt aerosol concentration without oxidative activity. DTT levels were measured using the electrochemical sensor.  $\text{F}^-$  levels were measured using ion chromatography. (B) DTT signal response as standard oxidant (1,4-NQ) was added to react on-line without aerosol delivered.

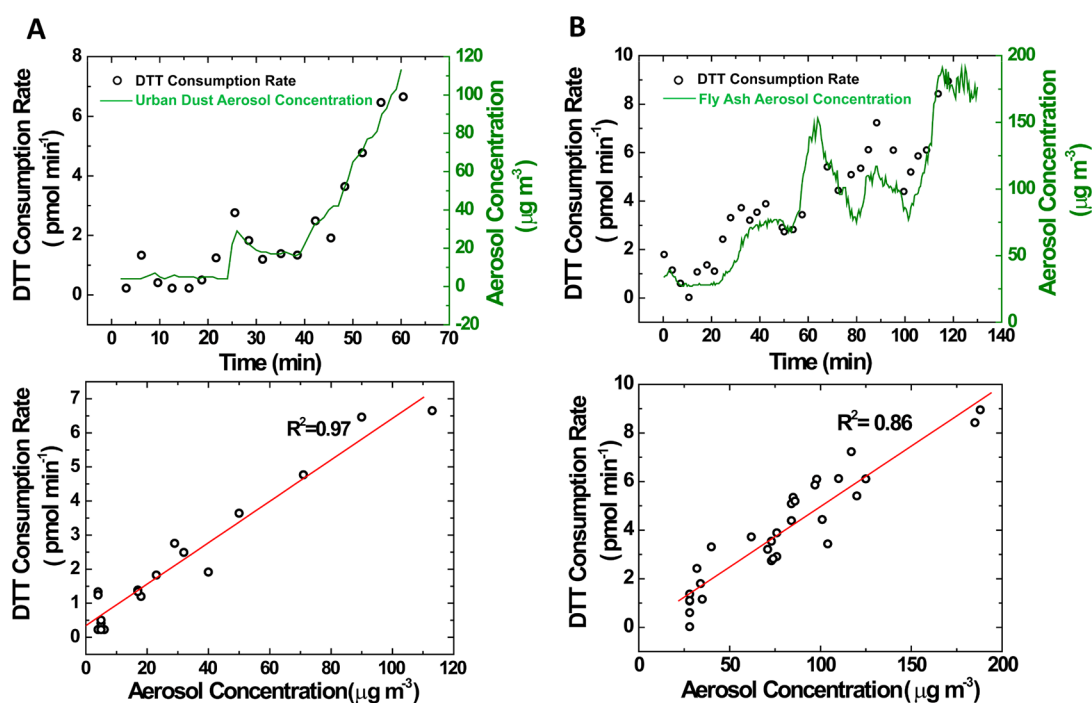

**Figure 5.** Correlation of the DTT consumption rate with the aerosol concentration for (A) standard reference material urban dust and (B) standard reference fly ash. The top panels show the DTT consumption rate (black y axis) and aerosol concentration (green y axis) as a function of the experiment time. The bottom panels plot the DTT consumption rate as a function of the aerosol concentration and show the resultant correlation coefficient.

311 demonstrate a decreasing DTT signal for increasing NaCl  
 312 aerosol concentration (and thus increased water) delivered to  
 313 the PILS impaction plate, which is indicative of sample dilution.  
 314 The internal standard was used to account for this dilution  
 315 effect and to correct the measurement of aerosol oxidative  
 316 activity. A decrease in measured fluoride concentration,  
 317 proportional to the salt aerosol concentration, is also shown  
 318 in Figure 4A and demonstrates our ability to account for this  
 319 phenomenon.

320 In the on-line system, various experimental conditions were  
 321 different from those of our validated off-line assay, including  
 322 temperature ( $\sim 37$  to  $\sim 28$   $^{\circ}\text{C}$ ) and the chemical mixing  
 323 environment. The on-line DTT assay was therefore tested  
 324 using 1,4-NQ as a model oxidant. For this test the PILS was  
 325 allowed to sample only filtered, particle-free air. To simulate  
 326 exposure to an oxidant under the conditions of the PILS, 1,4-

NQ was injected through a T-valve at the entrance to the PILS,  
 which is above the impaction plate. The decreasing DTT  
 for higher concentrations of 1,4-NQ demonstrates DTT  
 consumption by a standard oxidant under on-line operation  
 (Figure 4B). The amount of 1,4-NQ used was equivalent to  
 what was used in the off-line system, and the DTT  
 consumption of the standard oxidant was of the same  
 magnitude as that observed in the off-line system, indicating  
 the viability of the on-line DTT assay.

To demonstrate on-line performance more fully, standard  
 reference samples of urban dust and fly ash (industrial  
 incinerator ash) were aerosolized, sampled, and analyzed for  
 their oxidative activity directly. These aerosols were selected  
 because of their varying chemical composition and because they  
 represent typical toxicants found in outdoor air. For each  
 sample, aerosol concentrations generated in the chamber were

343 in the range of those found in the urban atmosphere (4–120  $\mu\text{g}$   
344  $\text{m}^{-3}$ ). The results shown in the top panel of Figure 5A show  
345 DTT consumption corresponding to urban dust aerosol  
346 concentrations. As the aerosol concentration increased, the  
347 DTT consumption rate increased. Furthermore, the system  
348 provided high temporal resolution, reporting an independent  
349 measurement approximately once every 3 min. To the best of  
350 our knowledge, this is the highest temporal resolution for an  
351 aerosol oxidative activity measurement system that has been  
352 reported.<sup>25,26,31</sup> Higher temporal resolution could ultimately be  
353 obtained by reducing the volume of the injection loop and  
354 increasing the buffer flow rate through the system. In terms of  
355 aerosol mass, the on-line system required between 7 and 214 ng  
356 of particle mass per injection to observe quantifiable DTT  
357 consumption. This range was calculated using the PILS air  
358 sampling rate (12.5 L  $\text{min}^{-1}$ ), aerosol concentrations measured  
359 in the chamber (4–120  $\mu\text{g}\text{m}^{-3}$ ), and a 10  $\mu\text{L}$  injection loop.  
360 This mass range is approximately 3 orders of magnitude lower  
361 than the amount required for the traditional DTT assay (5–40  
362  $\mu\text{g}$ ).<sup>27–29,65</sup> A correlation plot between DTT consumption rate  
363 and aerosol concentration was constructed, and a strong linear  
364 correlation coefficient was obtained ( $R^2 = 0.97$ ) (Figure 5A,  
365 bottom panel). The performance of the system was further  
366 confirmed with a fly ash test aerosol. In this example, the fly ash  
367 aerosol concentration was varied faster and the DTT  
368 consumption rate was analyzed (Figure 5B, top panel)  
369 continuously. The on-line system was able to measure DTT  
370 consumption rates that were strongly correlated with the  
371 aerosol concentration ( $R^2 = 0.86$ ), even during periods of rapid  
372 concentration change. The oxidative activities of the urban dust  
373 and fly ash samples were comparable. The oxidative activity of  
374 the fly ash aerosol is believed to result from the transition-metal  
375 content of the sample.<sup>66,67</sup> ROS generated from urban dust  
376 aerosol might be attributed to PAHs and nitro-PAHs, which are  
377 major components of such a sample.<sup>68</sup>

## 378 ■ CONCLUSIONS

379 We present here for the first time a high temporal resolution  
380 on-line sampling/analysis system for aerosol oxidative activity  
381 using a microfluidic electrochemical sensor coupled with an on-  
382 line aerosol collection system. The determination of aerosol  
383 oxidative activity was based on the widely reported DTT assay  
384 but used electrochemical detection instead of photometric  
385 detection. The sensor was validated off-line for its performance  
386 in aerosol oxidative activity measurement. No significant  
387 differences for the aerosol oxidative activity expressed as the  
388 1,4-NQ equivalent were observed between the traditional assay  
389 and the sensor for 14 extracted ambient aerosol and biomass  
390 burning smoke filter samples. Using on-line monitoring of  
391 aerosol oxidative activity, high correlations between aerosol  
392 concentration and DTT consumption rate were observed for  
393 two representative test aerosols. The on-line system developed  
394 here shows promise as an eventual tool for field studies of  
395 aerosol oxidative activity. Such studies may lead to a better  
396 understanding of how PM can affect human and environmental  
397 health.

## 398 ■ ASSOCIATED CONTENT

### 399 ● Supporting Information

400 Experimental details, electrode fabrication diagram, electrode  
401 composition optimization results, DTT flow injection profiles  
402 and standard calibration, and extracted aerosol sample

information for the method validation test. This material is 403  
available free of charge via the Internet at <http://pubs.acs.org>. 404

## 405 ■ AUTHOR INFORMATION

### 406 Corresponding Author

407 [chuck.henry@colostate.edu](mailto:chuck.henry@colostate.edu)

### 408 Present Address

409 <sup>||</sup>State Key Laboratory of Atmospheric Boundary Layer and  
410 Atmospheric Chemistry Institute of Atmospheric Physics,  
411 Chinese Academy of Sciences, Beijing, China.

### 412 Notes

413 The authors declare no competing financial interest.

## 414 ■ ACKNOWLEDGMENTS

415 This work was supported by the National Institute of  
416 Environmental Health Sciences (NIH Grant ES019264). Y.Sa.  
417 gratefully acknowledges the financial support from the Royal  
418 Thai Government Scholarship, Ministry of Science and  
419 Technology.

## 420 ■ REFERENCES

- 421 Ichoku, C.; Andreae, M. O.; Andreae, T. W.; Meixner, F. X.;  
422 Schebeske, G.; Formenti, P.; Maenhaut, W.; Cafmeyer, J.; Ptasinski, J.;  
423 Karnieli, A.; Orlovsky, L. *J. Geophys. Res., [Atmos.]* **1999**, *104*, 24371.
- 424 (2) Ghelfi, E.; Rhoden, R.; Wellenius, G. A.; Lawrence, J.; Gonzalez-  
425 Flecha, B. *Toxicol. Sci.* **2008**, *102*, 328.
- 426 (3) Hoek, G.; Meliefste, K.; Cyrys, J.; Lewne, M.; Bellander, T.;  
427 Brauer, M.; Fischer, P.; Gehring, U.; Heinrich, J.; van Vliet, P.;  
428 Brunekreef, B. *Atmos. Environ.* **2002**, *36*, 4077.
- 429 (4) de Kok, T. M.; Hogervorst, J. G.; Briede, J. J.; van Herwijnen, M.  
430 H.; Maas, L. M.; Moonen, E. J.; Driee, H. A.; Kleinjans, J. C. *Environ.*  
431 *Mol. Mutagen.* **2005**, *46*, 71.
- 432 (5) Verma, V.; Pakbin, P.; Cheung, K. L.; Cho, A. K.; Schauer, J. J.;  
433 Shafer, M. M.; Kleinman, M. T.; Sioutas, C. *Atmos. Environ.* **2011**, *45*,  
434 1025.
- 435 (6) Gauderman, W. J.; Vora, H.; McConnell, R.; Berhane, K.;  
436 Gilliland, F.; Thomas, D.; Lurmann, F.; Avol, E.; Kunzli, N.; Jerrett,  
437 M.; Peters, J. *Lancet* **2007**, *369*, 571.
- 438 (7) Prahalad, A. K.; Soukup, J. M.; Inmon, J.; Willis, R.; Ghio, A. J.;  
439 Becker, S.; Gallagher, J. E. *Toxicol. Appl. Pharmacol.* **1999**, *158*, 81.
- 440 (8) Clarke, R. W.; Catalano, P.; Coull, B.; Koutrakis, P.; Murthy, G.  
441 G. K.; Rice, T.; Godleski, J. J. *Inhalation Toxicol.* **2000**, *12*, 73.
- 442 (9) Ghelfi, E.; Rhoden, C. R.; Wellenius, G. A.; Lawrence, J.;  
443 Gonzalez-Flecha, B. *Toxicol. Sci.* **2008**, *102*, 328.
- 444 (10) Cho, A. K.; Sioutas, C.; Miguel, A. H.; Kumagai, Y.; Schmitz, D.  
445 A.; Singh, M.; Eiguren-Fernandez, A.; Froines, J. R. *Environ. Res.* **2005**,  
446 *99*, 40.
- 447 (11) Beck-Speier, I.; Dayal, N.; Karg, E.; Maier, K. L.; Schumann, G.;  
448 Schulz, H.; Semmler, M.; Takenaka, S.; Stettmaier, K.; Bors, W.; Ghio,  
449 A.; Samet, J. M.; Heyder, J. *Free Radical Biol. Med.* **2005**, *38*, 1080.
- 450 (12) Kreyling, W. G.; Semmler, M.; Moller, W. *J. Aerosol Med.* **2004**,  
451 *17*, 140.
- 452 (13) Hatzis, C.; Godleski, J. J.; Gonzalez-Flecha, B.; Wolfson, J. M.;  
453 Koutrakis, P. *Environ. Sci. Technol.* **2006**, *40*, 2805.
- 454 (14) Xiao, G. G.; Wang, M. Y.; Li, N.; Loo, J. A.; Nel, A. E. *J. Biol.*  
455 *Chem.* **2003**, *278*, S0781.
- 456 (15) Li, N.; Kim, S.; Wang, M.; Froines, J.; Sioutas, C.; Nel, A.  
457 *Inhalation Toxicol.* **2002**, *14*, 459.
- 458 (16) Kunzli, N.; Mudway, I. S.; Gotschi, T.; Shi, T. M.; Kelly, F. J.;  
459 Cook, S.; Burney, P.; Forsberg, B.; Gauderman, J. W.; Hazenkamp, M.  
460 E.; Heinrich, J.; Jarvis, D.; Norback, D.; Payo-Losa, F.; Poli, A.; Sunyer,  
461 J.; Borm, P. J. A. *Environ. Health Perspect.* **2006**, *114*, 684.
- 462 (17) Kovarik, M. L.; Li, M. W.; Martin, R. S. *Electrophoresis* **2005**, *26*,  
463 202.
- 464 (18) Jung, H.; Guo, B.; Anastasio, C.; Kennedy, I. M. *Atmos. Environ.*  
465 **2006**, *40*, 1043.



- 466 (19) Foucaud, L.; Wilson, M. R.; Brown, D. M.; Stone, V. *Toxicol. Lett.* **2007**, *174*, 1.
- 467 (20) Bernardoni, V.; Cuccia, E.; Calzolari, G.; Chiari, M.; Lucarelli, F.; Massabo, D.; Nava, S.; Prati, P.; Valli, G.; Vecchi, R. *X-Ray Spectrom.* **2011**, *40*, 79.
- 471 (21) Hu, S.; Polidori, A.; Arhami, M.; Shafer, M. M.; Schauer, J. J.; Cho, A.; Sioutas, C. *Atmos. Chem. Phys.* **2008**, *8*, 6439.
- 473 (22) Poschl, U. *Angew. Chem., Int. Ed.* **2005**, *44*, 7520.
- 474 (23) Vidrio, E.; Phuah, C. H.; Dillner, A. M.; Anastasio, C. *Environ. Sci. Technol.* **2009**, *43*, 922.
- 476 (24) Ivanova, N. A.; Onischuk, A. A.; Vosel, S. V.; Purtov, P. A.; Kulik, L. V.; Rapatskiy, L. L.; Vasenin, N. T.; Anufrienko, V. F. *Appl. Magn. Reson.* **2009**, *35*, 625.
- 479 (25) Venkatachari, P.; Hopke, P. K. *Aerosol Sci. Technol.* **2008**, *42*, 480–489.
- 481 (26) Venkatachari, P.; Hopke, P. K.; Grover, B. D.; Eatough, D. J. *J. Atmos. Chem.* **2005**, *50*, 49.
- 483 (27) Li, Q. F.; Wyatt, A.; Kamens, R. M. *Atmos. Environ.* **2009**, *43*, 484–489.
- 485 (28) Li, N.; Sioutas, C.; Cho, A.; Schmitz, D.; Misra, C.; Sempf, J.; Wang, M. Y.; Oberley, T.; Froines, J.; Nel, A. *Environ. Health Perspect.* **2003**, *111*, 455.
- 488 (29) Kumagai, Y.; Koide, S.; Taguchi, K.; Endo, A.; Nakai, Y.; Yoshikawa, T.; Shimojo, N. *Chem. Res. Toxicol.* **2002**, *15*, 483.
- 490 (30) Kam, W.; Ning, Z.; Shafer, M. M.; Schauer, J. J.; Sioutas, C. *Environ. Sci. Technol.* **2011**, *45*, 6769.
- 492 (31) Venkatachari, P.; Hopke, P. K. *J. Aerosol Sci.* **2008**, *39*, 168.
- 493 (32) Weber, R. J.; Orsini, D.; Daun, Y.; Lee, Y. N.; Klotz, P. J.; Brechtel, F. *Aerosol Sci. Technol.* **2001**, *35*, 718.
- 495 (33) Orsini, D. A.; Ma, Y. L.; Sullivan, A.; Sierau, B.; Baumann, K.; Weber, R. J. *Atmos. Environ.* **2003**, *37*, 1243.
- 497 (34) Beer, D.; Weber, J. *Opt. Commun.* **1972**, *5*, 307.
- 498 (35) Wang, Y.; Hopke, P. K.; Sun, L.; Chalupa, D. C.; Utell, M. J. *J. Toxicol.* **2011**, *2011*, 419476.
- 500 (36) Garcia, C. D.; Henry, C. S. *Anal. Chim. Acta* **2004**, *508*, 1.
- 501 (37) Noblitt, S. D.; Lewis, G. S.; Liu, Y.; Hering, S. V.; Collett, J. L.; Henry, C. S. *Anal. Chem.* **2009**, *81*, 10029.
- 503 (38) Hu, M.; Yan, J.; He, Y.; Lu, H.; Weng, L.; Song, S.; Fan, C.; Wang, L. *ACS Nano* **2010**, *4*, 488.
- 505 (39) Lee, J. H.; Song, Y. A.; Han, J. Y. *Lab Chip* **2008**, *8*, 596.
- 506 (40) Dishinger, J. F.; Kennedy, R. T. *Electrophoresis* **2008**, *29*, 3296.
- 507 (41) Xu, X. L.; Zhang, S.; Chen, H.; Kong, J. L. *Talanta* **2009**, *80*, 8.
- 508 (42) Sassa, F.; Morimoto, K.; Satoh, W.; Suzuki, H. *Electrophoresis* **2008**, *29*, 1787.
- 510 (43) Holcomb, R. E.; Kraly, J. R.; Henry, C. S. *Analyst* **2009**, *134*, 511–516.
- 512 (44) Sameenoi, Y.; Mensack, M. M.; Boonsong, K.; Ewing, R.; Dungchai, W.; Chailapakul, O.; Cropek, D. M.; Henry, C. S. *Analyst* **2011**, *136*, 3177.
- 515 (45) Jokerst, J. C.; Emory, J. M.; Henry, C. S. *Analyst* **2012**, *137*, 24.
- 516 (46) Huang, X. J.; Kok, W. T. *Anal. Chim. Acta* **1993**, *273*, 245.
- 517 (47) Shahrokhian, S.; Hamzehloei, A.; Thaghani, A.; Mousavi, S. R. *Electroanalysis* **2004**, *16*, 915.
- 519 (48) Martin, R. S.; Gawron, A. J.; Fogarty, B. A.; Regan, F. B.; Dempsey, E.; Lunte, S. M. *Analyst* **2001**, *126*, 277.
- 521 (49) Siangproh, W.; Chailapakul, O.; Laocharoensuk, R.; Wang, J. *Talanta* **2005**, *67*, 903.
- 523 (50) Svancara, L.; Vytras, K.; Kalcher, K.; Walcarus, A.; Wang, J. *Electroanalysis* **2009**, *21*, 7.
- 525 (51) Noh, H. B.; Lee, K. S.; Lim, B. S.; Kim, S. J.; Shim, Y. B. *Electrophoresis* **2010**, *31*, 3053.
- 527 (52) Halbert, M. K.; Baldwin, R. P. *Anal. Chem.* **1985**, *57*, 591.
- 528 (53) Korfhage, K. M.; Ravichandran, K.; Baldwin, R. P. *Anal. Chem.* **1984**, *56*, 1514.
- 530 (54) Pereira-Rodrigues, N.; Cofre, R.; Zagal, J. H.; Bedioui, F. *Bioelectrochemistry* **2007**, *70*, 147.
- 532 (55) Halbert, M. K.; Baldwin, R. P. *J. Chromatogr.* **1985**, *345*, 43.
- 533 (56) Oshea, T. J.; Lunte, S. M. *Anal. Chem.* **1994**, *66*, 307.
- (57) Kuhnline, C. D.; Gangel, M. G.; Hulvey, M. K.; Martin, R. S. *Analyst* **2006**, *131*, 202. 534
- (58) Leardi, R. *Anal. Chim. Acta* **2009**, *652*, 161. 536
- (59) Cookeas, E. G.; Efstathiou, C. E. *Analyst* **1994**, *119*, 1607. 537
- (60) Cookeas, E. G.; Efstathiou, C. E. *Analyst* **2000**, *125*, 1147. 538
- (61) Ntziachristos, L.; Froines, J.; Cho, A.; Sioutas, C. *Part. Fibre Toxicol.* **2007**, *4*, 5. 539
- (62) Chow, J. C.; Doraiswamy, P.; Watson, J. G.; Antony-Chen, L. W.; Ho, S. S. H.; Sodeman, D. A. *J. Air Waste Manage. Assoc.* **2008**, *58*, 141. 540
- (63) *CRC Handbook of Chemistry and Physics*; CRC Taylor & Francis: Boca Raton, FL, 2009. 544
- (64) Hansen, R. E.; Østergaard, H.; Nørgaard, P.; Winther, J. R. *Anal. Biochem.* **2007**, *363*, 77. 546
- (65) Cho, A. K.; Sioutas, C.; Miguel, A. H.; Kumagai, Y.; Schmitz, D. A.; Singh, M.; Eiguren-Fernandez, A.; Froines, J. R. *Environ. Res.* **2005**, *99*, 40. 548
- (66) Di Pietro, A.; Visalli, G.; Munaò, F.; Baluce, B.; La Maestra, S.; Primerano, P.; Corigliano, F.; De Flora, S. *Int. J. Hyg. Environ. Health* **2009**, *212*, 196. 552
- (67) Rucinski, C. *Certificate of Analysis: Trace Metal-Industrial Incinerator Ash*; Resource Technology Corp.: Laramie, WY, 2008. 553
- (68) Wise, S. A.; Watters, R. L. *National Institute of Standards and Technology*; Gaithersburg, MD, 2009. 555